


MODEL IPT

HEAVY DUTY INDEXING POWERED TURNTABLE

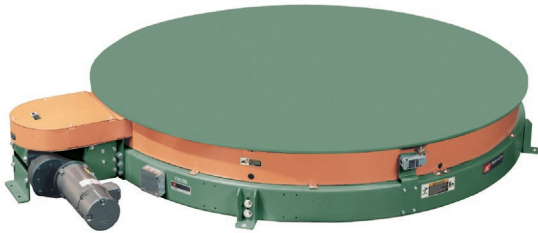

PRICES INCLUDE

- **ROTATION:** 2 position, 3 position or 4 position
- **SPEED:** 35 fpm at outside diameter
- **CHAIN DRIVE:** no. 80 roller chain
- **CHAIN GUARD:** chain drive is completely enclosed
- **CASTERS:** (8) 4" dia. heavy duty rubber-covered casters support rotation of turntable carrier platform
- **DIAMETER:** 3'-0", 3'-6", 4'-0", 4'-6", 5'-0", 5'-6", 6'-0", 6'-6", 7'-0", 7'-6" and 8'-0" dia.
- **CARRIER PLATFORM:** 3" structural platform with 1/2" thick steel plate supported by heavy duty casters
- **BEARINGS:** heavy duty ball bearing 4-hole flange
- **CAPACITY:** 4000 lbs. max. product load
- **MOTOR DRIVE:** 3/4 HP, 230/460/3, 60 cycle, SUPER E right angle gear motor with brake
- **ELEVATION:** minimum 12-1/2" to top of plate with (4) structural leveling supports included
- **ELECTRICAL CONTROLS:** limit switches supplied as follows: 2 position = 2 limit switches; 3 position = 3 limit switches; 4 position = 4 limit switches

■ 6 week shipment


"A"	"B"	PRICE	WT. (LBS.)
3'	53 3/4"	\$7,909	718
4'	65 3/4"	\$9,854	926
6'	89 3/4"	\$12,600	1421
8'	113 3/4"	\$16,803	2045

IMPORTANT NOTES


SUPPORTS ARE INTEGRATED INTO CONVEYOR ASSEMBLY

PRICING DOES NOT INCLUDE CONVEYOR MOUNTED ON TOP PLATFORM

CONSULT FACTORY WITH CONVEYOR SPECIFICATIONS, TRANSITION ROLLERS MAY BE REQUIRED



MINIMUM CONVEYOR DISTANCE IS 45° ON EITHER SIDE OF TURNTABLE DRIVE; TURNTABLE IS CAPABLE OF 45° INTERVALS



GENERIC REFERENCE FOR STANDARD LIMIT SWITCH MOUNTED POSITIONS

